



MAXICRYL PRIMER SURFACER

PRODUCT DESCRIPTION

Basco Autoguard Maxicryl Primer Surfacer is a two-component Acrylic/Isocyanate system that provides a safe base for the motorcar finish in this range. It is chemical resistant, flexible and can be rubbed down with abrasive paper to conveniently allow for good adhesion and high gloss of finish.

TECHNICAL DATA

FINISH: Matt.

APPLICATION: By spray (or brush if on wood) Recommended spraying pressure @ 45-55 p.s.i

THINNING: Use Basco Maxicryl Thinner only. Thinning for spraying is usually added at a ratio of 4:1:1 (paint: hardener: thinner.) Thinner ratio may be exceeded to suit spraying viscosity of 26-28 seconds B4 cup.

DRYING TIME: Touch Dry: 1 hour


CLEANING: Clean equipment with Basco Maxicryl Thinner

OVERCOATS: Basco Autoguard Maxicryl Finishes.

PACK SIZES: ½ litre, 1 litre and 4 litres.

SPECIFICATIONS

- Surface to be primed must be clean, dry and free from dust, oil, grease or any contaminant.
- Mix Primer, Hardener and Thinner at a ratio of 4:1:1. Let it sit for 30 minutes before spraying.
- Handle primed surface after 24 hours.
- For filling or smoothing, use Basco Spot Putty.
- Sanding down is best when abrasive paper is introduced onto water wet primed surface
- Keep away from naked flame. **INFLAMMABLE**
- Avoid contact with skin and eyes by wearing goggles and protective clothes.
- Spray in well-ventilated areas only.

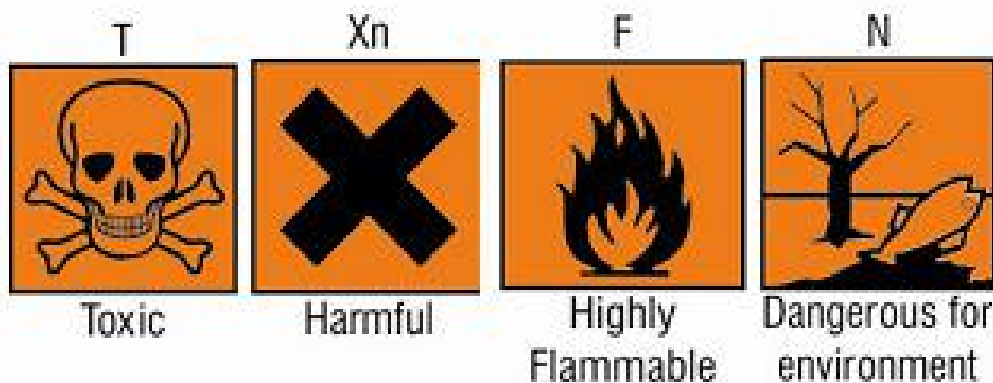

DISCLAIMER: The information and recommendation set forth in this Product Data Sheet are based upon tests conducted by Basco Products (K) Ltd. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Basco Products (K) Ltd. Representative to obtain the most recent Product Data Information.

KEEP OUT OF REACH OF CHILDREN
PROTECT FROM FREEZING
REFER TO MSDS FOR ADDITIONAL HEALTH AND SAFETY INFORMATION

