



## BASCO AUTOGUARD MAXICRYL

### PRODUCT DESCRIPTION

Basco Autoguard Maxicryl is a two-component system enamel which gives high gloss appearance, excellent gloss retention, good weather as well as scratch and chemical resistance.

### RECOMMENDED FOR

Basco Maxicryl is designed for refinishing of automotive vehicles in general, for line finishing of commercial vehicles or whenever a high-quality finish is required.

### TECHNICAL DATA

**FINISH:** High gloss of 90%-95% at 60 degrees on gloss meter

**APPLICATION:** Mainly by spraying. Recommended spraying pressure @45-55p.s.i

**THINNING:** Use Basco Maxicryl thinner only

**POT LIFE:** The mixture has a pot life of 4-6 hours


**CLEANING:** Clean equipment with Basco Maxicryl thinner immediately

**COLOURS:** As requested

**PRIMING:** Recommended primer is Basco Maxicryl primer or Basco Autoguard 2K Acrylic Primer

**POLISHING:** Polishing can be done after 14 days

**PACK SIZE:** 1 litre and 4 litres

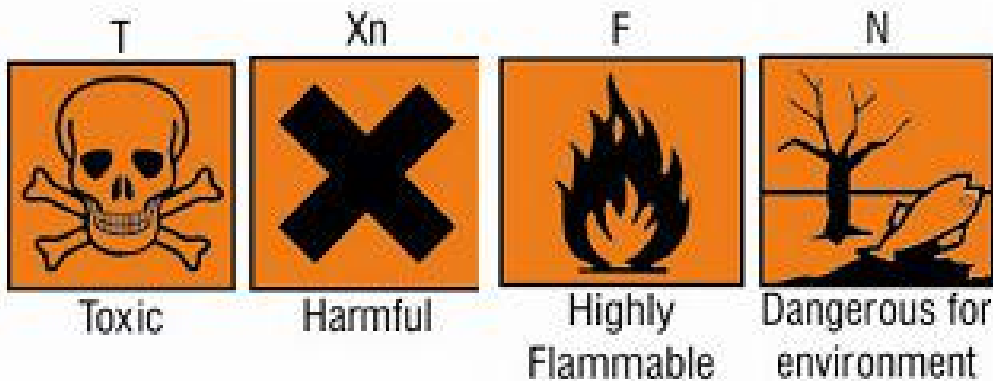

**DISCLAIMER:** The information and recommendation set forth in this Product Data Sheet are based upon tests conducted by Basco Products (K) Ltd. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Basco Products (K) Ltd. Representative to obtain the most recent Product Data Information.

**KEEP OUT OF REACH OF CHILDREN**  
**PROTECT FROM FREEZING**  
REFER TO MSDS FOR ADDITIONAL HEALTH AND SAFETY INFORMATION